


Cal. 12.7x99 mm



SPECIAL BULLETS

Solid API

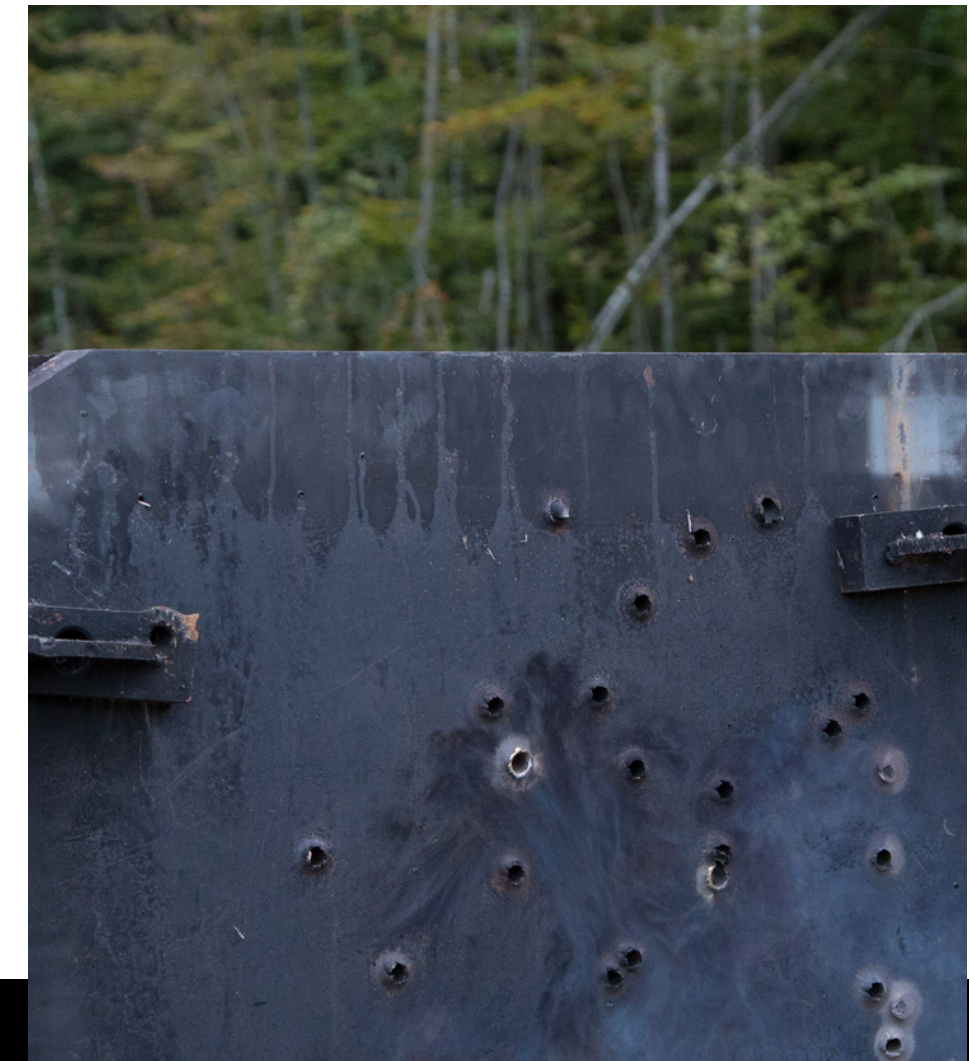

BALISTIC DATA

Cal. 12.7x99 mm with bullet	P+3Sd (bar)	Accuracy mean radius
Solid API	max. 4500	$R_{mean} \leq 1,2 \text{ MOA}$ $R_{mean} \leq 38,4 \text{ cm at } 1100 \text{ m (1200 yards)}$

Used for Sniper Rifles caliber 12.7mm (.50)

Incendiary Solid API: At 500 m, the incendiary composition of bullets shall ignite cloth soaked in petrol located behind the armor plate.

PACKAGING

Version 1	Version 2
<ul style="list-style-type: none"> • 10 round in cardboard box • 10 cardboard boxes (100 rounds) in metal box M2A1 • 2 metal boxes (200 rounds) in wire bound wooden crate 	<ul style="list-style-type: none"> • 10 rounds in cardboard box • 5 cardboard boxes (50 rounds) in PVC bag • 2 PVC bags (100 rounds) in carton case

TECHNICAL DATA

Element		Material
		Solid API
Bullet	Jacket	Brass
	Core	Special steel
	Filler	Thermite comp.
Cartridge case		Brass
Propelling charge		NCD powder
Primer		Boxer non-corrosive