


Cal. 7.62 mm

M82 BLANK

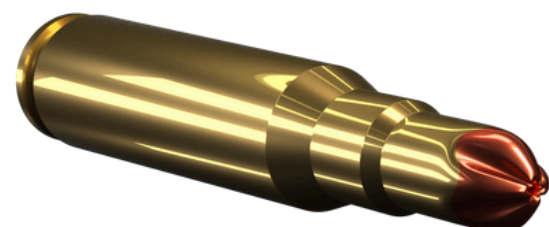

BALISTIC DATA

Cyclic rate

The cartridges shall operate the M60 Machine Gun at a cyclic rate of not less than 450 cartridges per minute and the M240 Machine Gun at a cyclic rate of not less than 650 cartridges per minute.

Used for 7.62x51mm weapon caliber

PACKAGING

Version 1	Version 2	Version 3	Version 4
<ul style="list-style-type: none"> • 20 rounds in cardboard box • 28 cardboard boxes (560 rounds) in metal box M2A1 • 2 metal boxes (1120 rounds) in wooden crate 	<ul style="list-style-type: none"> • 20 rounds in cardboard box • 10 cardboard boxes (200 rounds) in PVC bag • 5 PVC bags (1000 rounds) in carton case 	<ul style="list-style-type: none"> • 250 rounds in metal link belt (M13) • 2 metal link belts (500 rounds) in metal box M2A1 • 2 metal boxes (1000 rounds) in wooden crate 	<ul style="list-style-type: none"> • 250 rounds in metal link belt (M13) • 1 metal link belts in metal box M19A1 • 4 metal boxes (1000 rounds) in wooden crate

TECHNICAL DATA

Element	Material	Weight (g)	Length (mm)
Cartridge case	Brass	~11,8	64, 50
Propelling charge	For blank ammunition	~0,85	-
Primer	Boxer non-corrosive	0, 34	-
Cartridge		Average Q (100) ± 0,4 g	63, 15