




Cal. 12.7x108 mm

APT

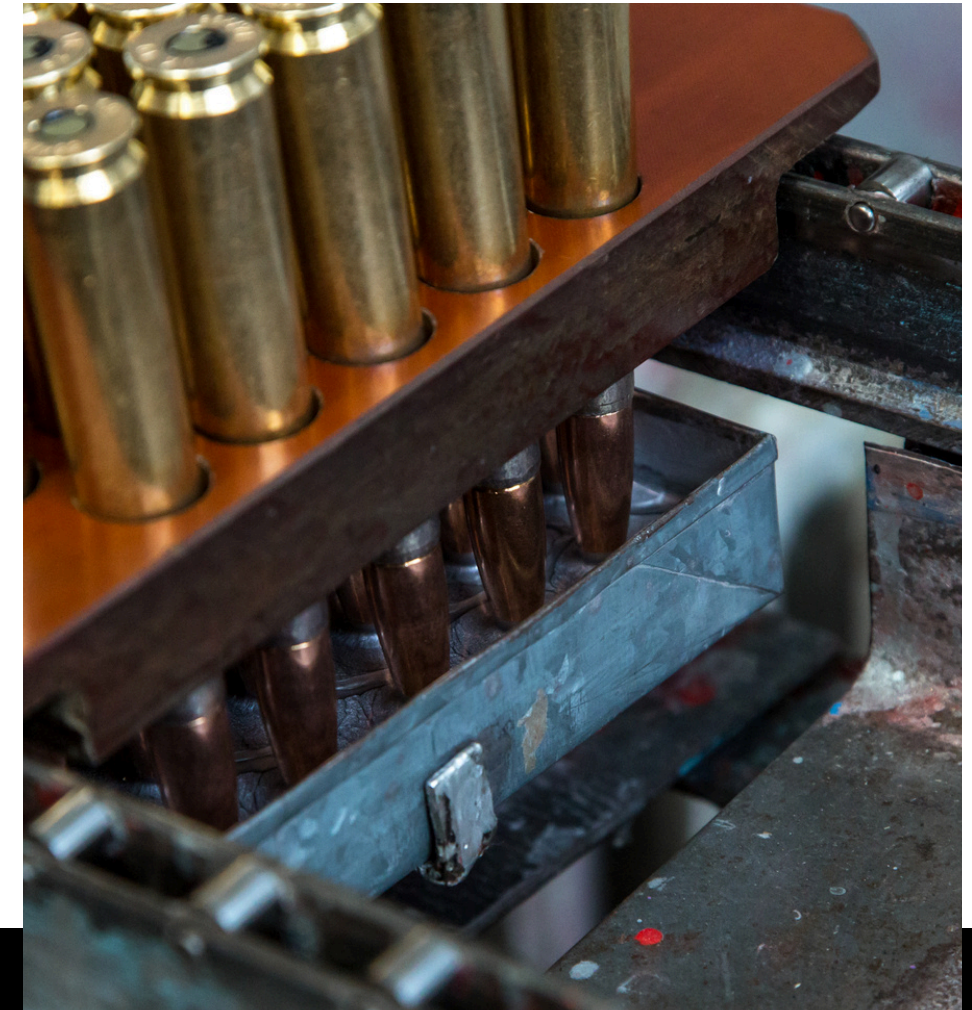

BALISTIC DATA

Cal. 12.7x108 mm with bullet	V _{23,77} (m/s)	P (bar)	Accuracy mean radius (cm) at 300 m	Tracer visibility
APT	min. 810	max. 3114	max. 20	Visible trace not less than 1000 m from the weapon

Used for 12.7 x 108 mm caliber weapons

PACKAGING

Version 1	Version 2	Version 3	Version 4
<ul style="list-style-type: none"> • 104 rounds in sheet metal • 2 sheet metal boxes (208 rounds) in wooden crate 	<ul style="list-style-type: none"> • 50 rounds in one DShK belt • 1 DShK belts in one metal box (50 rounds) • 2 metal boxes in wooden crate (100 rounds) 	<ul style="list-style-type: none"> • 10 rounds in cardboard box • 5 cardboard boxes (50 rounds) in PVC bag • 2 PVC bags (100 rounds) in carton case 	<ul style="list-style-type: none"> • 60 rounds in one DShK belt • 1 DShK belts in one DShK metal box (60 rounds) • 3 DShK metal boxes in wooden crate (180 rounds)

TECHNICAL DATA

Element		Material	Weight (g)	Length (mm)
		APT	APT	APT
Bullet	Jacket	Tombac plated steel strip or cooper washer steel strip	44, 00 (679 gr)	64, 50
	Core	Steel		
	Tracer mix.	Tracer compos.		
	Tube	Tombac		
	Filler, point	Borax		
Liner		Lead antim.		
Cartridge case		Brass	~67,00	108
Propelling charge		NC powder	~16,50	-
Primer		Berdan	1, 10	4, 15
Cartridge			Average Q (100) ± 2g	147, 00