


# Cal. 7.62x54 mm R



AP

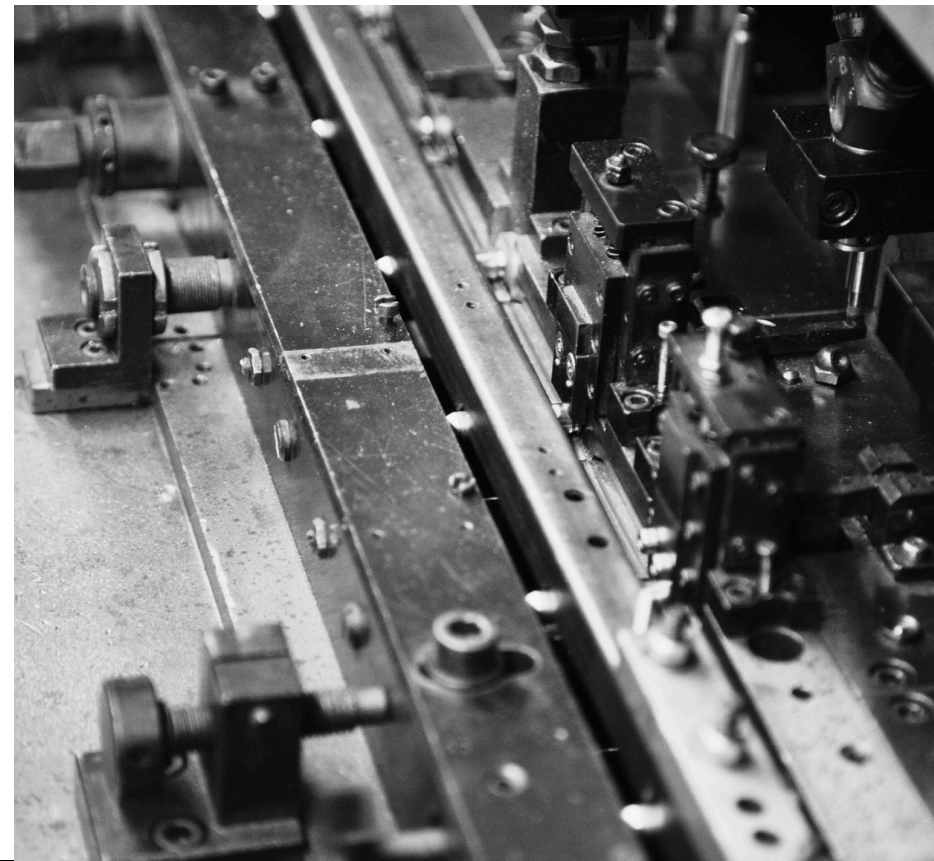

## BALISTIC DATA

Cal. 7.62x54 mm with bullet	V <sub>23,77</sub> (m/s)	P (bar)	Accuracy mean radius (cm) at 300 m
AP	min. 780	max. 3898	max. 20

Penetration AP: The bullet shall demonstrate complete penetration of 6 mm thick armor plate, min 420 HB, located 100 meters from the weapon.

## TECHNICAL DATA

Element		Material	Weight (g)	Length (mm)
		AP	AP	AP
Bullet	Jacket	Tombac	10, 30	36, 00
	Core	Steel	(159 gr)	
	Cup, closure	Lead antimony		
Cartridge case		Brass	~10,00	53, 65
Propelling charge		NC powder	~3,20	-
Primer		Boxer non-corrosive	0, 34	3, 30
Cartridge			Average Q (100) ± 0,5 g	77, 16

## PACKAGING

Version 1	Version 2
<ul style="list-style-type: none"> <li>• 15 rounds in cardboard box</li> <li>• 28 cardboard boxes (420 rounds) in metal box M2A1</li> <li>• 2 metal boxes (840 rounds) in wooden crate</li> </ul>	<ul style="list-style-type: none"> <li>• 15 rounds in cardboard box</li> <li>• 10 cardboard boxes (150 rounds) in PVC bag</li> <li>• 5 PVC bags (750 rounds) in carton case</li> </ul>